

## Overview

JetCon 1701GP-U is an PoE injector. The JetCon 1701GP-U is an advanced and cost effective high power PoE injector, which applies power to Ethernet RJ-45 for power devices (PDs). JetCon1701GP-U are classified as power source equipment (PSE), providing up to 90 watts to powered devices(PD). It could provide power for the powered devided (PD) which compliant IEEE 802.3af/at/bt (draft 2.0). The JetCon 1701GP-U adopts rugged metal case design to operate in harsh environment (-40~75°C). It also IP-31 standard protection. JetCon 1701GP-U recommend working voltage is DC 52V. (Input range: DC44~ 57 V).

## Package List

- ▶ JetCon 1701GP-U Industrial PoE Injector
- ▶ Quick Installation Guide


## Installation

### Mount the unit

Din-Rail mount: Mount the din-rail clip on the rear of JetCon 1701GP-U on the DIN rail. For information about the DIN Rail installation, please refer to user's manual.


### Grounding JetCon 1701GP-U

There is one grounding screw on the bottom side of JetCon 1701GP-U . Connect the frame grounding of JetCon 1701GP-U to the grounding surface to ensure safety and prevent noise for communication interference.

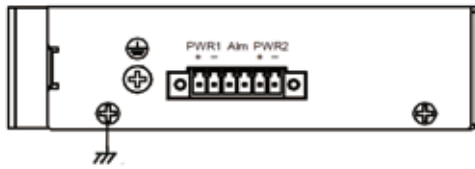

### Wiring the Power Inputs


1. Insert the positive and negative wires into the V+ and V- contact on the terminal block connector.
2. Tighten the wire-clamp screws to prevent the power wires loosened.

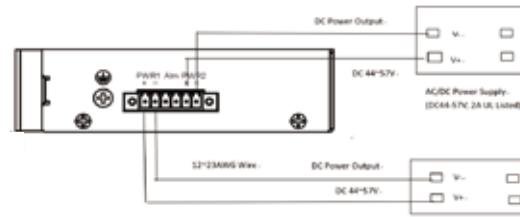

### Wiring the Relay Output

The relay output contacts are in the middle of the terminal block connector as shown below. By inserting the wires, relay output alarm will detect power fault, and form a short circuit. The alarm relay output is "Normal Open". For more information, please refer Manual chapter for more detail.

Note: The relay contact only support 1A current, DC 24V. It does not recommend apply higher voltage and current that over this specification.

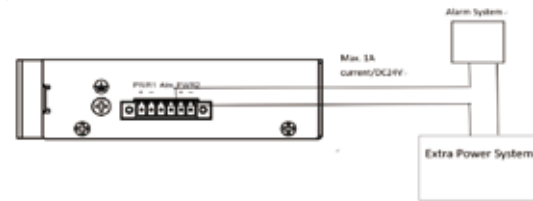

### Connecting to Network

**Connecting the Gigabit PoE port:** The port supports IEEE 802.3af/at/bt PoE standard and The PoE port can offer 15W/30W/60W/90W power one end of an Ethernet cable into the UTP port of JetCon 1701GP-U , while the other end is connected to the attached networking device.

## Support

### 5 Years Warranty

Each of Korenix's product line is designed, produced, and tested with high industrial standard. Korenix warrants that the Product(s) shall be free from defects in materials and workmanship for a period of five (5) years from the date of delivery provided that the Product was properly installed and used.

This warranty is voided if defects, malfunctions or failures of the warranted Product are caused by damage resulting from force measure (such as floods, fire, etc.), other external forces such as power disturbances, over spec power input, or incorrect cabling; or the warranted Product is misused, abused, or operated, altered and repaired in an unauthorized or improper way.

**Attention! To avoid system damage caused by sparks, please DO NOT plug in power connector when power is on.**

The product is in compliance with Directive 2002/95/EC and 2011/65/EU of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronics equipment(RoHS Directives & RoHS 2.0)

### Korenix Customer Service

KoreCARE is Korenix Technology's global service center, where our professional staffs are ready to solve your problems at any time Korenix global service center's e-mail is KoreCARE@korenix.com.

For more information and documents download please visit our website:

<http://www.korenix.com/page/doc/index.aspx>

JetCon 1701GP-U 是单端口快速以太网到光纤介质转换器符合802.1af/at/bt JetCon 1701GP-U具有冗余电源输入，具有电压范围DC44~57V。

关于快速安装指南

“快速安装指南”旨在指导专业安装人员安装和配置JetCon 1701GP-U。它涵盖了帮助您避免意外问题的程序。

### 常规



警告: 此符号表示您必须遵守的警告



注意: 此符号表示您必须注意的重要注意事项。

### 产品清单

- ▶ JetCon 1701GP-U Gigabit PoE 供电器\*1
- ▶ 快速安装指南\*1


## 安装

### Din-Rail 支架：

将JetCon 1701GP-U背面的Din-rail夹子安装在DIN导轨。有关DIN导轨安装的信息请参考用户手册。


### JetCon 1701GP-U 接地：

JetCon 1701GP-U底部有一个接地螺丝。将JetCon 1701GP-U连接框架接地以保证安全，防止噪音用于通信干扰。

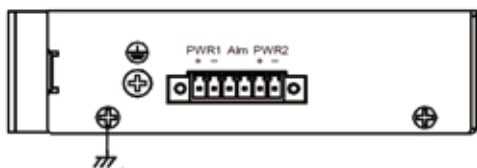

### 输入电源接线：


1. 将正极和负极线插入端子块连接器上的V+和V-触点。(如下图)
2. 拧紧电线夹螺钉，防止电源线松动。

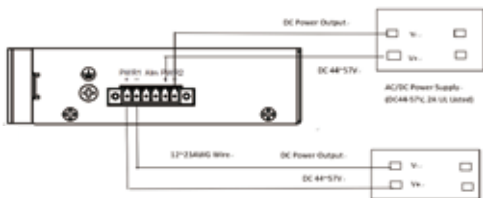

**注意:** 推荐的输入电压为DC 52V。(可输入范围：DC44~57V)

### 接线输出

继电器输出触点位于连接器端子中间，如下所示。继电器输出报警将检测端口或电源故障，并形成短路。有关更多信息，请参阅手册章节了解更多详细信息。

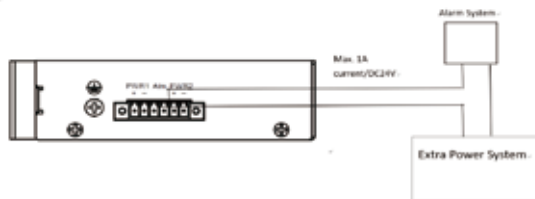

**注意:** 继电器触点仅支持1A电流，DC 24V。不建议使用超过本规范的更高的电压和电流。

### 连接到网络

连接以太网端口：将以太网电缆的一端连接到JetCon 1701GP-U的UTP端口，另一端连接到所连接的网络设备。

## 客户服务

### 5年质保

所有科洛理思产品的设计、制造及测试都是采用较高的工业标准。科洛理思保证自产品出货日起提供最高5年之免费保修服务，保修期间如因零件损坏或制程不良而导致产品故障，我们将提供免费维修服务。

然而，自然外力(火、水、雷灾)所造成的产品故障，或其它外部因素如电源干扰、不当电源输入、不当接线等造成的损坏，不列入产品保固范围；此外，产品被误用、未经授权的修理及修改等行为将造成保固条款失效。

**注意!** 请勿于电源开启时插拔接线端子，以避免产生火花造成系统损坏。

此产品保证完全符合欧盟2003年1月27日电气和电子设备有害物质限制委员会所提出的限用指令2002/95/EC(ROHS禁令)及2011/65/EU(RoHS 2.0)。

### Korenix售后服务

KoreCARE 是科洛理思科技全球服务中心，我们专业的技术人员随时准备解答您的疑问。科洛理思全球服务中心 EMAIL: KoreCARE@korenix.com

详细说明及文件请至网站下载: <http://www.korenix.com/page/doc/index.aspx>

业务服务: [sales@korenix.com.cn](mailto:sales@korenix.com.cn)

官网: [www.korenix.com.cn](http://www.korenix.com.cn)

## Korenix Technology Co., Ltd. (A Beijer Electronics Group Company)

Tel: +886-2-89111000

Fax: +886-2-29123328

Business service: [sales@korenix.com](mailto:sales@korenix.com)

Customer service: [koreCARE@korenix.com](mailto:koreCARE@korenix.com)

[www.korenix.com](http://www.korenix.com)

CPQ00V1701GPU

Patent No. (Taiwan):  
 Granted Invention: I 313547  
 Granted Invention: I 321415  
 Granted Invention: I 344766  
 Granted Invention: I 346480  
 Granted Invention: I 356616  
 Granted Invention: I 364684  
 Granted Invention: I 376118  
 Granted Invention: I 393317  
 Granted Invention: I 398066  
 Granted Invention: I 398125  
 Granted Invention: I 459757  
 Utility Model: M 339841  
 Utility Model: M 339840